

GUYING WIRES

REINFORCED HOSE

TREES SHALL BEAR SAME
RELATION TO FINISH GRADE
AS IN NURSERY

GUY TREES OVER 5'-0" HIGH

DO NOT PRUNE CONIFERS

2 PLY REINFORCED RUBBER
HOSE, POSITIONED DIRECTLY
ABOVE TREE BRANCH

12 GAUGE GALV. DOUBLE STRAND
TWISTED GUYING WIRE, 3 GUYS
PER TREE 120 DEG. APART

TURNBUCKLE AND SURVEYORS
FLAGGING TAPE (WHITE)

3" MULCH
3" SAUCER

2"X2"X30" GUYING
HARDWOOD STAKE


PLANTING MIXTURE

REMOVE BURLAP FROM TOP 1/3
OF BALL. REMOVE ALL PLASTIC
AND ROT PROOF WRAP

SET BALL ON 6"
COMPACTED TOPSOIL

SCARIFY SETTING
BED TO 3" DEPTH

12"

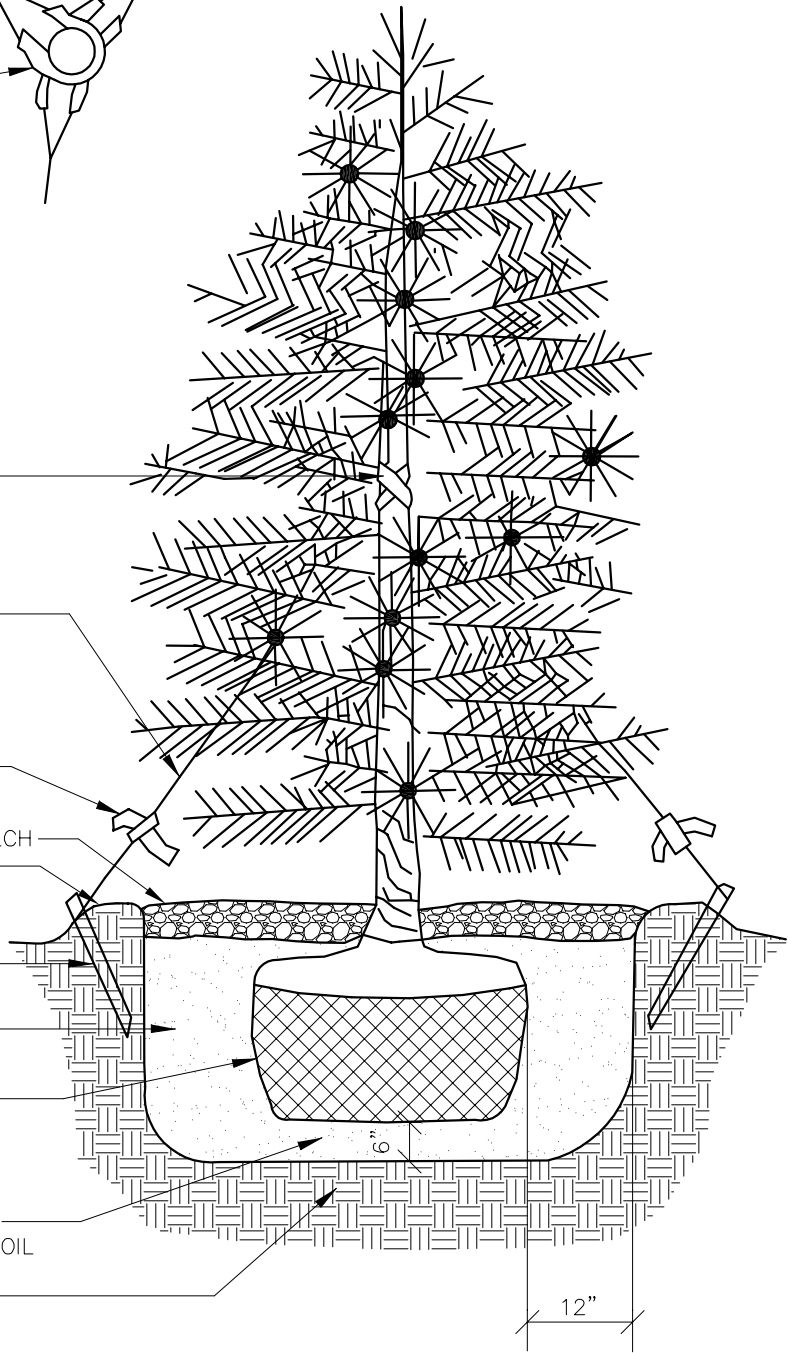

C					
B					
A					
	DESCRIPTION	DRW	CKD	APP	DATE
REVISIONS					
DRAWN BY: S.D.A.					
CHECKED BY: S.D.A.					
APPROVED:					

PLANTING, CONIFEROUS TREE

SCALE: NONE

CITY OF DETROIT
WATER AND SEWERAGE
DEPARTMENT
ENGINEERING
DIVISION

SHEET 1 OF 1

DWG No. 02900-01